

EER MODULATOR WITH POWER AMPLIFIER HAVING
FEEDBACK LOOP PROVIDING A SOFT OUTPUT IMPEDANCE
398-853

1/4

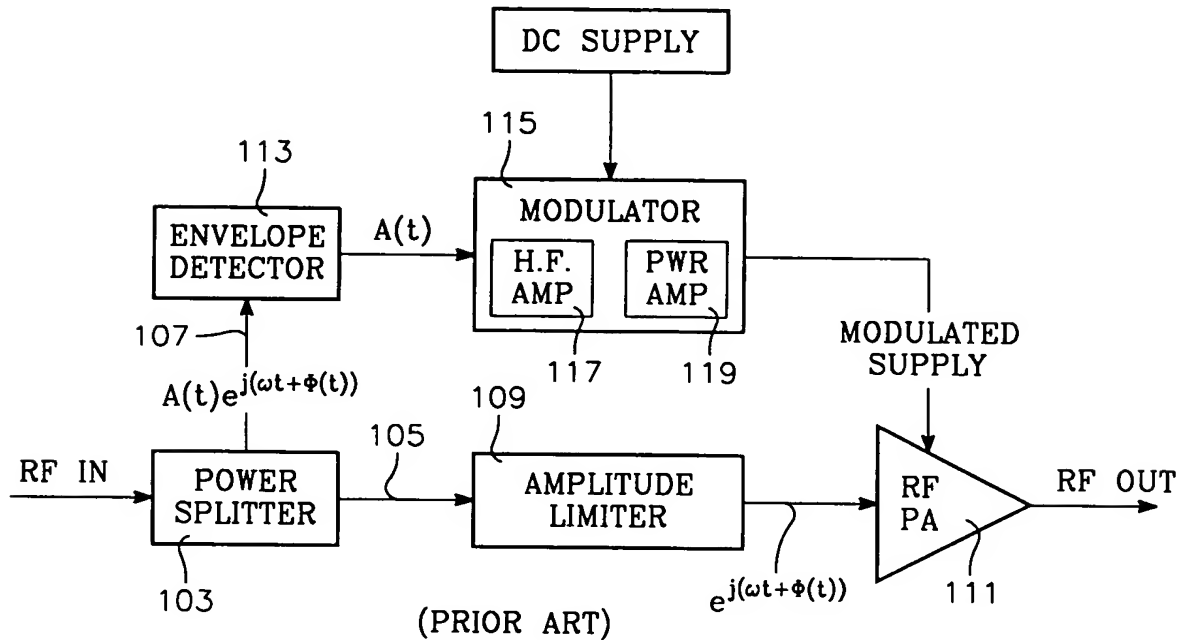


FIG. 1


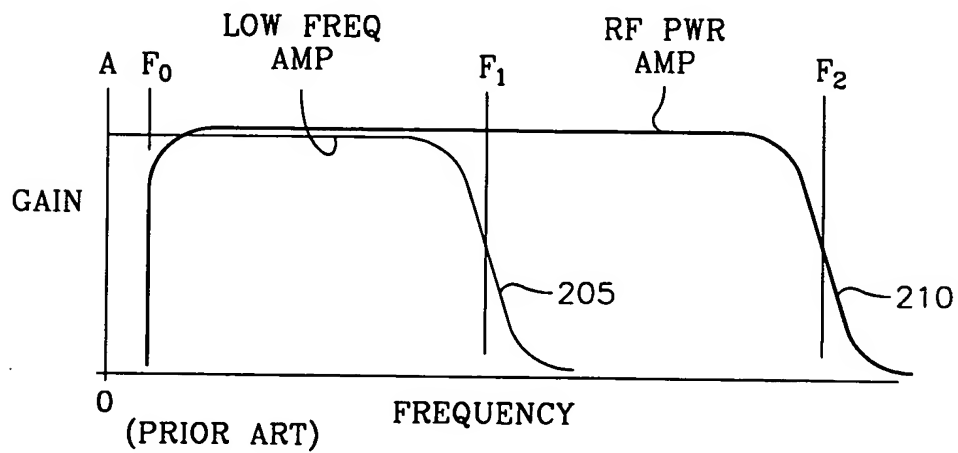


FIG. 2

EER MODULATOR WITH POWER AMPLIFIER HAVING
FEEDBACK LOOP PROVIDING A SOFT OUTPUT IMPEDANCE
398-853

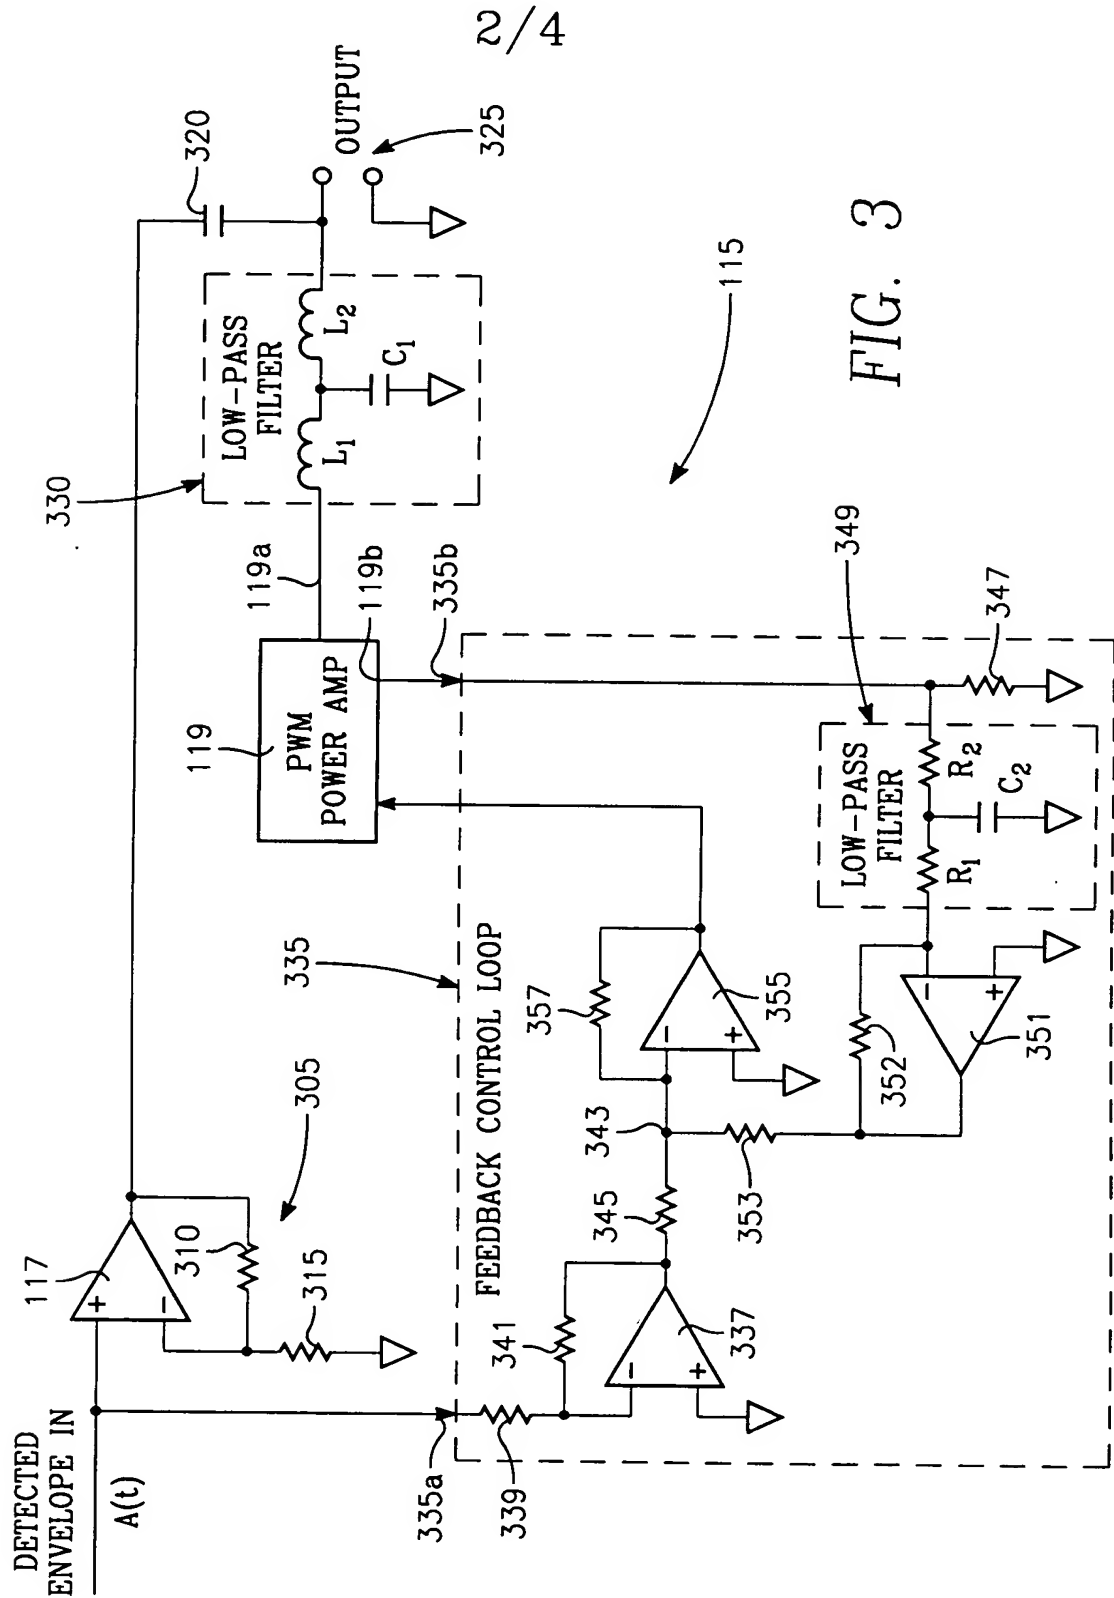

EER MODULATOR WITH POWER AMPLIFIER HAVING
FEEDBACK LOOP PROVIDING A SOFT OUTPUT IMPEDANCE
398-853

3/4

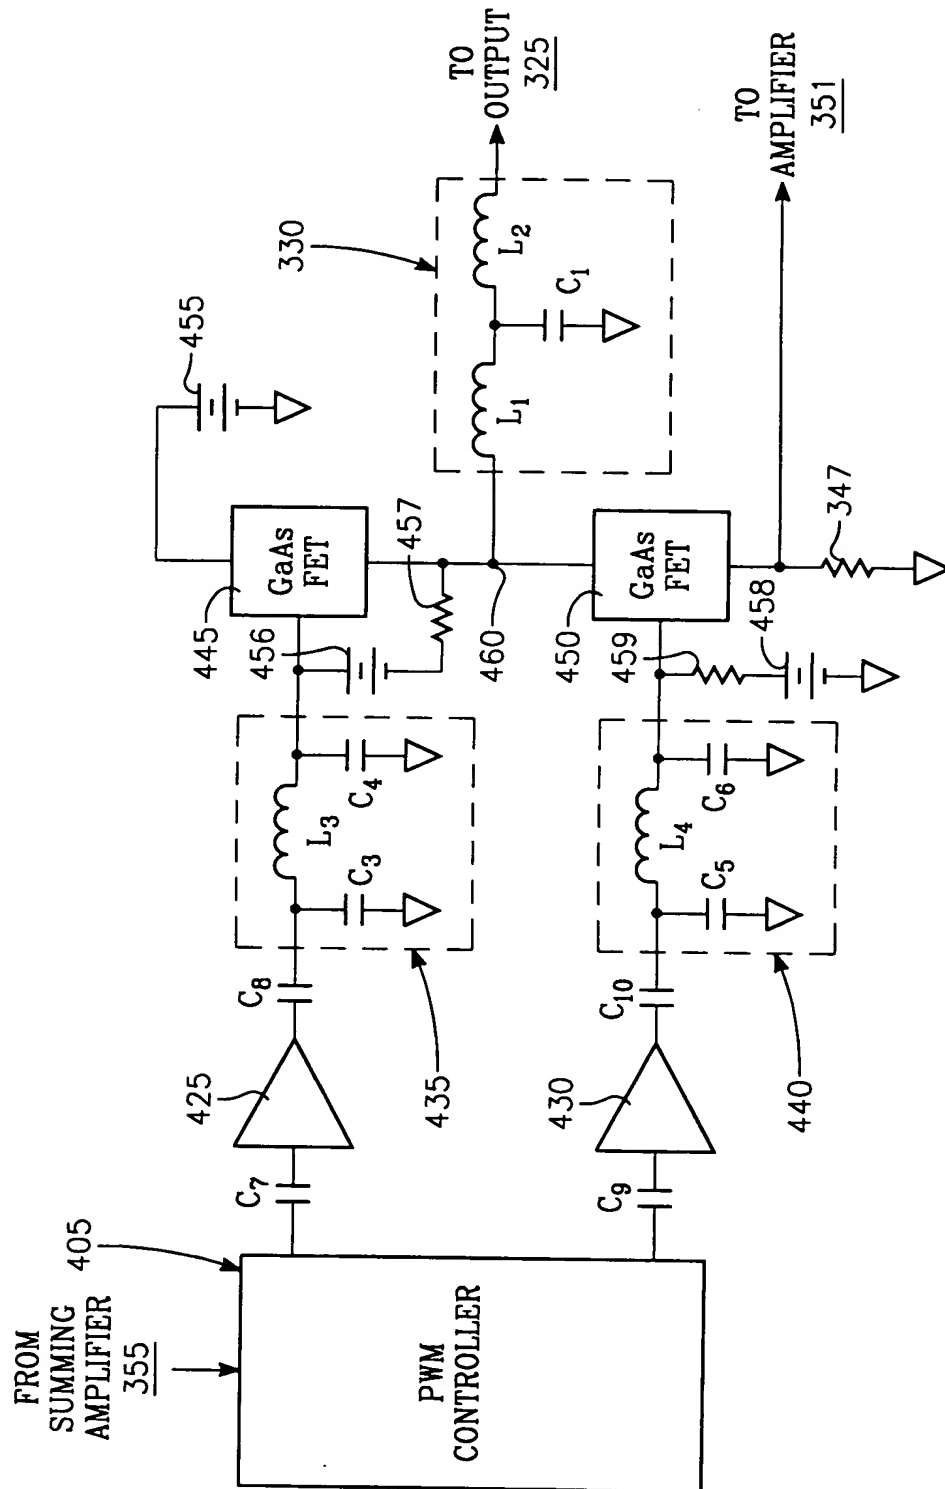


FIG. 4

EER MODULATOR WITH POWER AMPLIFIER HAVING
FEEDBACK LOOP PROVIDING A SOFT OUTPUT IMPEDANCE
398-853

4/4

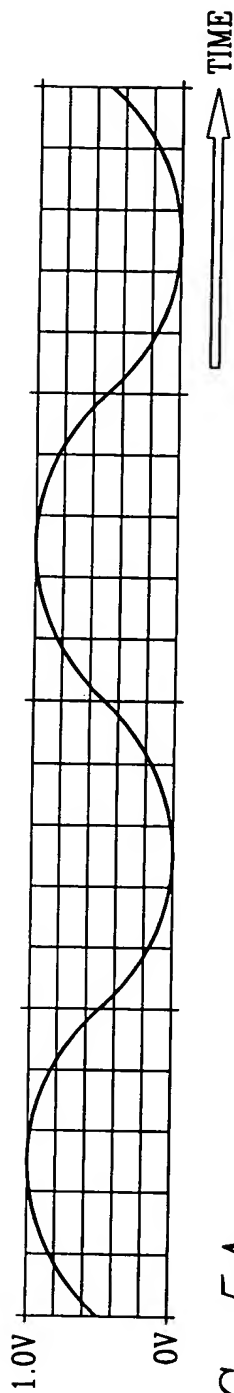


FIG. 5A

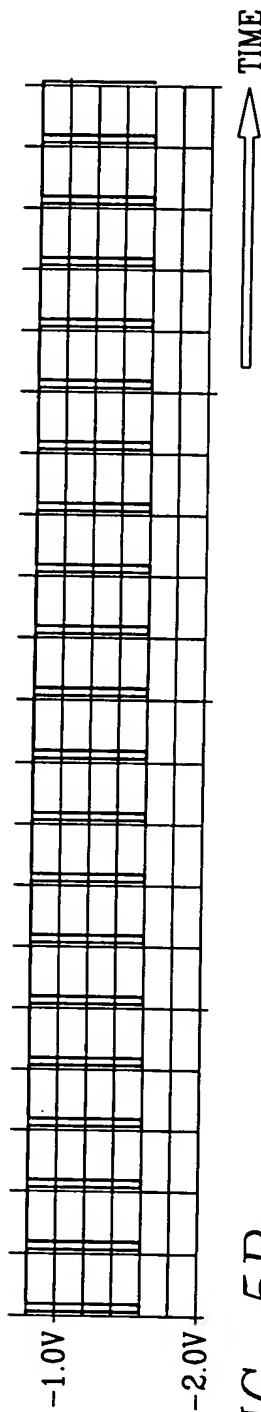


FIG. 5B

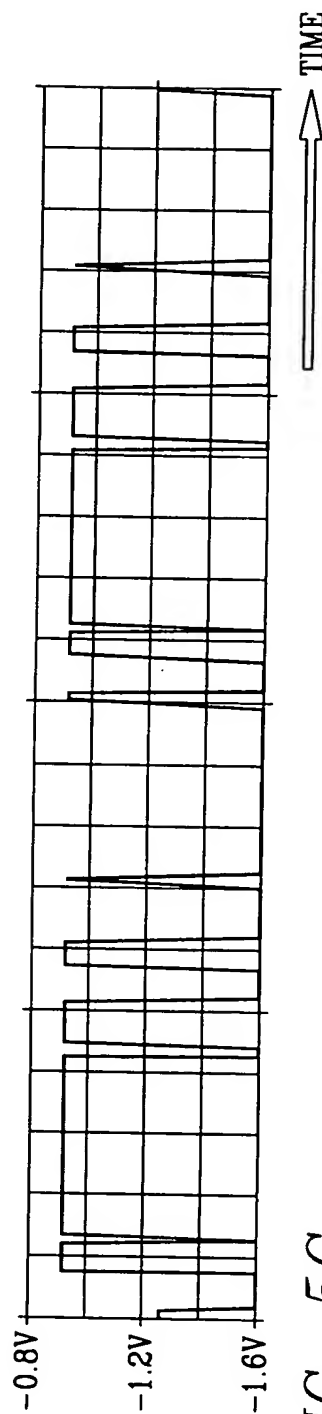


FIG. 5C